
Effect of mobile cellular tower radio frequency on health

Prepared by : Nabaz Jamal Ahmad

1. Introduction

- Radiation: Radiation is energy that comes from a source and travels through space and may be able to penetrate various materials
- Four main types of ionizing radiation alpha, beta, gamma and neutrons

1. Specific Absorption Rate (SAR)

A SAR value is a measure of the maximum energy absorbed by a unit of mass of exposed tissue of a person using a mobile phone, over a given time or more simply the power absorbed per unit mass. SAR values are usually expressed in units of watts per kilogram (W/kg) in either 1g or 10g of tissue.

Every country has a regulatory threshold value of SAR for mobile phone devices. In India the regulatory unit being 1.6 W/kg.


In case of moto E the Head SAR is 1.0 W/kg and body worn SAR is 1.36 W/kg. (One can check this by typing *#0# in one's phone)

Though the SAR value of moto E lies within the regulatory limits, the value is quite on the higher side when compared to its counterparts of Samsung, Nokia, Micromax, Lenovo, Sony etc.

The highest values of SAR are sadly boasted by Motorola phones (1.5 - 1.05) while the lowest enjoyed by likes of Micromax (0.2 - 0.6) with Blackberry, Apple, Nokia, Samsung, LG, etc coming in between.


- 1. The SAR values recorded on the FCC's authorization and in the cell phone manual to demonstrate compliance with Commission rules indicate only the highest single measurement taken for each frequency range that the particular model uses. FCC approval means that the device will never exceed the maximum levels of consumer RF exposure permitted by federal guidelines, but it does not indicate the amount of RF exposure consumers experience during normal use of the device. While only the maximum SAR values are used for FCC approval, all test reports submitted by the manufacturer are available in full for public inspection on the Commission's website.
- 2. FCC's RF exposure standard, the Federal Communications Commission (FCC)
- 3. For instance, cellphones can't be sold officially in the US if their SAR level exceeds 1.6 watts per kg (W/kg) while manufacturers in Europe must ensure that the maximum SAR level does not exceed 2W/kg.

- ٦. SAR is a measure of the rate of RF (radiofrequency) energy absorption by the body from the source being measured.
 - V. The guidelines created a measure of the rate that body tissue absorbs radiation during cell phone use called the specific absorption rate (SAR). The SAR for cell phone radiation was set at a maximum of 1,٦ watts of energy absorbed per kilogram
 - Λ. How do radio waves affect the human body?
 - ٩. Radiofrequency (RF) radiation, which includes radio waves and microwaves, is at the low-energy end of the electromagnetic spectrum. ... If RF radiation is absorbed in large enough amounts by materials containing water, such as food, fluids, and body tissues, it can produce heat. This can lead to burns and tissue damage[١]
- Nowadays, mobile cellular towers spread in corners of the globe and it people in the world use cellular phones as a communication device every day. The population on earth live in both natural and man-made radiation world and in this research, the focus is on radiation of radio frequencies of base station towers on human health and this could be decreased in real world. Radiation itself is the energy that comes from a source and travels through space and may be able to penetrate various materials [١]. Radiation broadly is categorized into two parts, firstly, Ionizing radiation that have enough energy to cause ionization Occurs from the addition or removal of electrons from neutral atoms that can change the chemical reactions in the body and leads to damage in biological tissues including DNA such as Gamma Rays and X-Rays. The second type is Non-ionizing Radiation that does not have enough energy to cause ionization in human body and it only causes heating effect on body and does not have long-term damage on human tissues such as radar, radio frequency from cell phones. Electromagnetic radiation is a type of energy that all around us and takes many forms such as radio waves, microwaves, X-Rays and Gamma Rays..etc. and electromagnetic waves are composed of Magnetic Field and Electric Field which are perpendicular to each other [٢],[١٣].

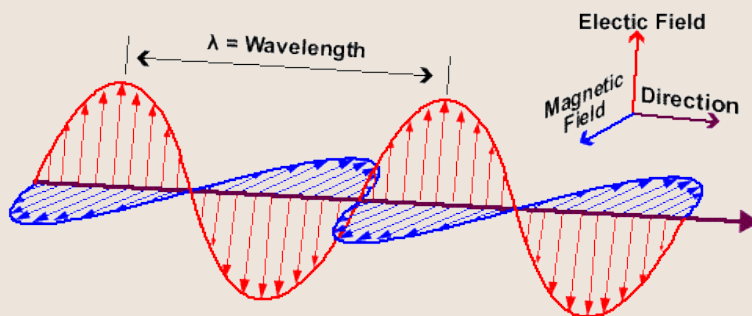

The international scientific committee ICNIRP (International Commission on Non-Ionizing Radiation Protection) has set guidelines for human exposure to EMF. The guidelines include a substantial safety margin to assure that no adverse health effects are experienced when EMF levels are within the established limits [٣] because, for example, in homes with highest

exposures, people reported more horrible symptoms including: (a) three times as many headaches, (b) 2,3 times the incidence of tremor, (c) 2,0 times the incidence of cold hands/feet and concentration problems, (d) 2,8 times the incidence of appetite loss, (e) twice as much exhaustion and (f) twice as much fatigue. Mild et al. [2] discovered that among people living closer than 300 m away from the BS, there was an increased incidence of headache. Chou et al. [3] claimed to have evidence of altered nerve function in the skin of a mobile phone user, around the ear area. [2],[3].

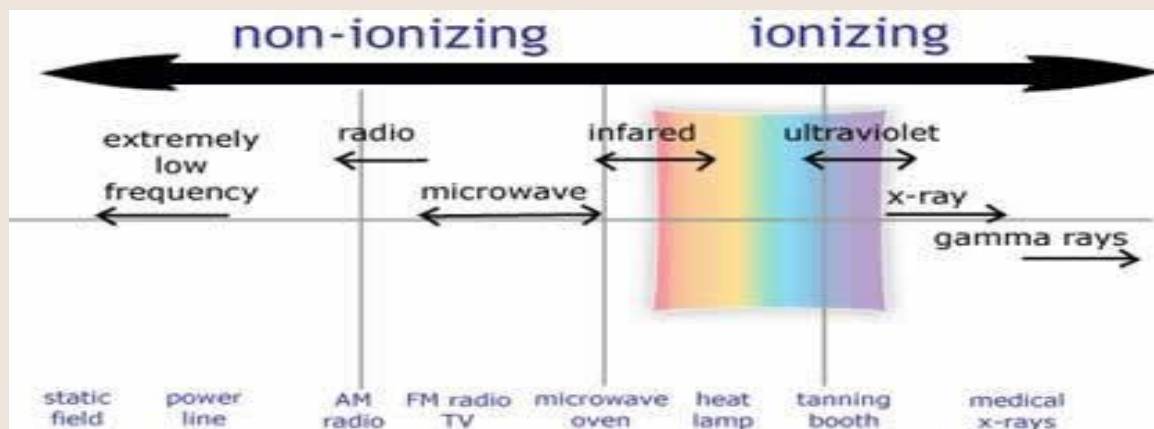

1.2 Specific Absorption Rate (SAR)

A SAR value is a measure of the maximum energy absorbed by a unit of mass of exposed tissue of a person using a mobile phone, over a given time or more simply the power absorbed per unit mass. SAR values are usually expressed in units of watts per kilogram (W/kg) in either 1g or 10g of tissue.

Every country has a regulatory threshold value of SAR for mobile phone devices. In India the regulatory unit being 1.6 W/kg.

In case of moto E the Head SAR is 1.0 W/kg and body worn SAR is 1.21 W/kg. (One can check this by typing *#0V# in one's phone)

Cell phones and other mobile devices emit radiofrequency (RF) waves, a type of non-ionizing electromagnetic radiation (commonly called “cell phone radiation”). When you hold or carry a mobile device close to your head and body, you can absorb over half of the transmitted RF energy.

Cell phone radiation level varies from device to device and is measured by the Specific Absorption Rate (SAR). A mobile device's SAR rating is used to estimate the maximum rate of RF energy absorption by a user's head and body when using the device [1][4].

SAR Can be measured by electric field and temperature rise

$$SAR = \sigma E^2 / \rho$$

E = Induced Field in Tissue (V/m)

σ = Tissue Electric Conductivity (S/m)

ρ = Tissue Conductivity (Kg/m³)

$SAR = \frac{\sigma |E|^2}{\rho c \Delta T}$


C = specific heat (kcal/kg.C)


ΔT = temperature rise

t = exposure time (sec.)

SAR can be determined by E Field or temperature measurement

Power density and SAR values:

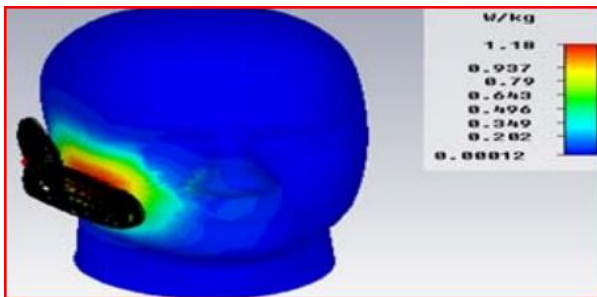

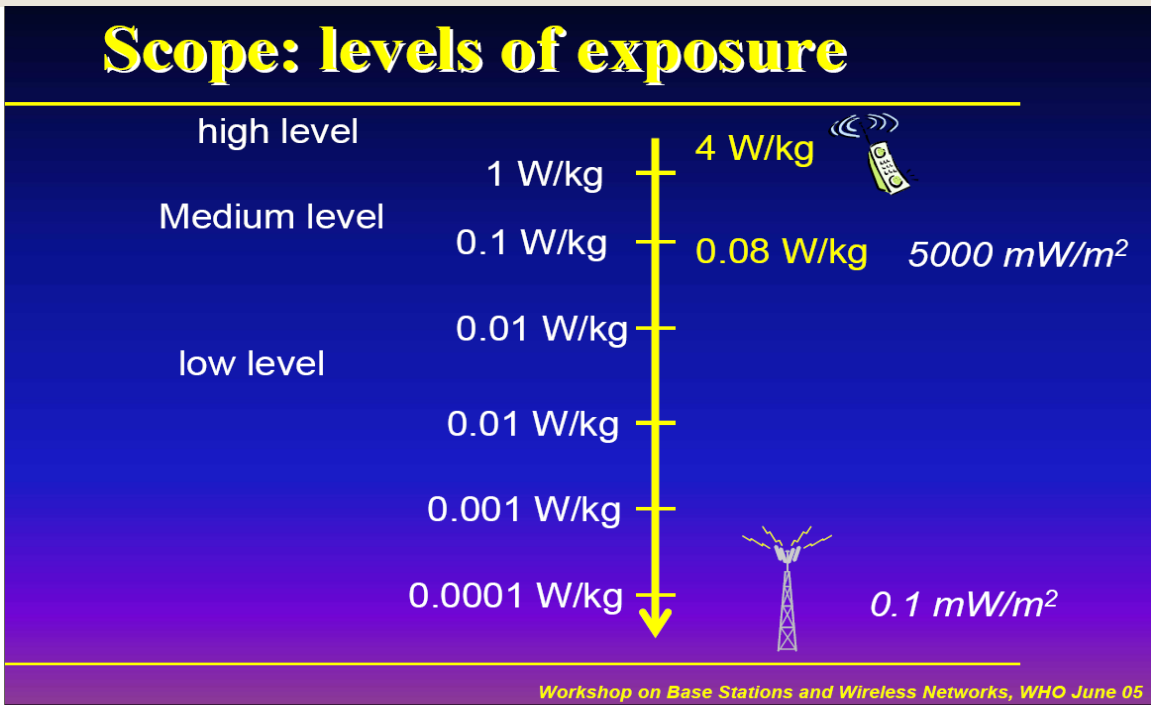

1.2 EMF limits for workers and the general public

Most countries have adopted the limits developed by ICNIRP which include safety margins designed to assure protection for EMF workers and the general public. The level of absorption is expressed as SAR (Specific Absorption Rate) with the unit W/kg (watts/ kilogram of body tissue). Exposure guideline limits for EMF workers are higher than for the general public because workers are adults who are generally exposed under known conditions and are trained to be aware of potential risk and to take appropriate precautions. Sufficient information or warning signs should be provided to ensure that other workers who have not received specific EMF training can take measures to avoid exposure above the relevant limit. Anyone who is not at work would be regarded as a member of the public and the public exposure guideline limits apply. In the frequency range from 10 MHz to 10 GHz, the EMF limits are expressed as SAR values, see 3.1.1 below. For practical assessments, e.g., using the field monitors described in section 3.2, ICNIRP also specifies frequency dependent reference levels, expressed as power density (S), electric field strength (E) and magnetic field strength (H). The reference levels can be used to show compliance with SAR limits but exceeding the reference levels does not

necessarily mean that the SAR limits are exceeded. Reference levels for power density [V],[A].

SAR limits	ICNIRP limits		
	Whole Body Averaged SAR	Local SAR Averaged over 10 g of tissue	
Workers' exposure limits	0.4 W/kg	10 W/kg	20 W/kg
General Public exposure limits	0.08 W/kg	2 W/kg	4 W/kg

[A] Figure

1.5 Compliance distance and Compliance Boundary

In principle, RF levels decrease rapidly when a person moves further away from the source, e.g., a transmitting antenna. For each antenna, the RF level can be calculated based on its electrical characteristics or measured. The distance at which the RF level is always below the RF limit is called the compliance distance. The compliance distance may be based on the reference levels or an SAR evaluation, in either case it incorporates a substantial safety margin. The figure shows an example of a sign used to inform about the compliance distance for RF workers. It is also possible to determine a three-dimensional (3D) compliance boundary around an antenna. The region inside the compliance boundary is often called the exclusion zone. The advantage of defining a compliance boundary is that it specifies the compliance distance in all directions. Usually base station antennas are highly directional and therefore the RF level behind the antenna is much smaller than in front of it [9].

In principle, RF levels decrease rapidly when a person moves further away from the transmitting antenna. For each antenna, the RF level can be measured based on its electrical characteristics. The distance at which the RF level is always below the RF limit is known as compliance distance. The compliance distance may be based on the reference levels or an SAR evaluation; in either case it incorporates a substantial safety margin [10]. The occupational exposure limits for RF fields: Action values - external electric and magnetic field strength, induced body current and exposure limit values - Peak SAR (10 g), whole body average SAR, induced current density (<10 MHz).

It is also possible to determine a 3D compliance boundary around an antenna. The region inside the compliance boundary is often known as exclusion zone. The advantage of compliance boundary is that it specifies the compliance distance in all directions. Usually BS antennas are highly directional and therefore the RF level behind the antenna is much smaller than in front of it.

The International Commission on Non-Ionizing Radiation Protection (ICNIRP) guidelines [12] specify an averaging time of 30 min. for determining the exposure level. Therefore, an RF level exceeding the reference level for a short period does not necessarily mean that the RF limit has been exceeded. In practice, this means that even if people walk through a compliance boundary zone, they are unlikely to be subject to overexposure. However, the averaging time should only be used with expert advice. In Fig. 3, the first boundary shows the danger zone, where the distance is very near to the BS and distance from first boundary to second boundary is the occupational distance limit and distance beyond this is the safe zone for general people

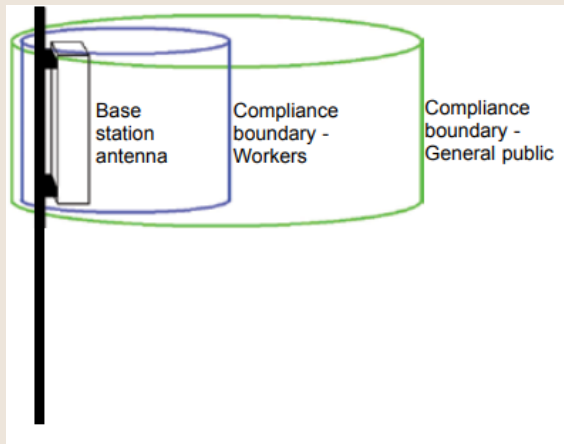


Figure ٢ [٩]

٩,٥ Thermal Effect

This effect of cellular phone radiation comes from two aspects. First one when the user is using the cellular phone, the phone is transmitting and receiving by its antenna and the microwave exposure is partially absorbed by the user's head and other body tissues. Second, ions in the cells in human body which can be turned into electric current by giving required amount of frequency, this electric energy also gets into heat energy as the dielectric loss exists in human body. The World health organization (WHO)/International Agency for Research on Cancer (IARC) has classified RF-EMFs as possibly carcinogenic to humans, based on an increased risk for glioma, a malignant type of brain cancer, associated with wireless phone use [١٠]. A group of German doctors found an increased incidence of cancer in patients living near mobile phone towers. The study found that after five years of exposure, people had three times the risk of developing cancer of those living further from the transmitter [١١]. However, most of the people don't know that they are having the sleep disorder and concentration problems due to EMF radiation or the people are less aware of it. And being a heavily populated country, this study looked at the effects of phone tower radiation among people living near ten GSM-BS antennas.


Results and Analysis


Practically, SAR was measured by using a power density device named by Narda Tool and this device measures the amount of power divided by the unit area (watts / square meters) or (milliwatts / square centimeters). We calibrated the device to take measurement samples within the frequency spectrum used by starts from ٩٢٥ MHz to ٩٦٠ MHz. These readings were taken from one of the site towers in Sulaimaniyah, and it is clear that the values of the emission power density do not exceed the limit allowed by the Iraqi Ministry of Environment (٠,٤ mW/cm^٢). On the other hand, we do not forget the effect of the mobile phone itself on the human being, as it is closer and may affect the person clearly if it is not used correctly as the

mobile phone emits radiation in all directions, and part of this radiation is distributed over the human head.

Distance	Power density
0.1 m	0.0304 mW/cm ²
0.2 m	0.0267 mW/cm ²
0.3 m	0.0202 mW/cm ²
0.4 m	0.0180 mW/cm ²
0.5 m	0.0150 mW/cm ²
0.6 m	0.0133 mW/cm ²
0.7 m	0.0120 mW/cm ²
0.8 m	0.0110 mW/cm ²
0.9 m	0.0099 mW/cm ²
1.0 m	0.0080 mW/cm ²
1.2 m	0.0069 mW/cm ²
1.4 m	0.0057 mW/cm ²
1.5 m	0.0050 mW/cm ²
1.7 m	0.0039 mW/cm ²
1.9 m	0.0030 mW/cm ²



Battery:		GPS:	35°33'16.9" N	Ant:	3AX 27M-3G	SrvTbl:	Ger.Funkd.
06.11.13	09:16:54		44°21'53.4" E	Cable:	---	Std:	ICNIRP GP

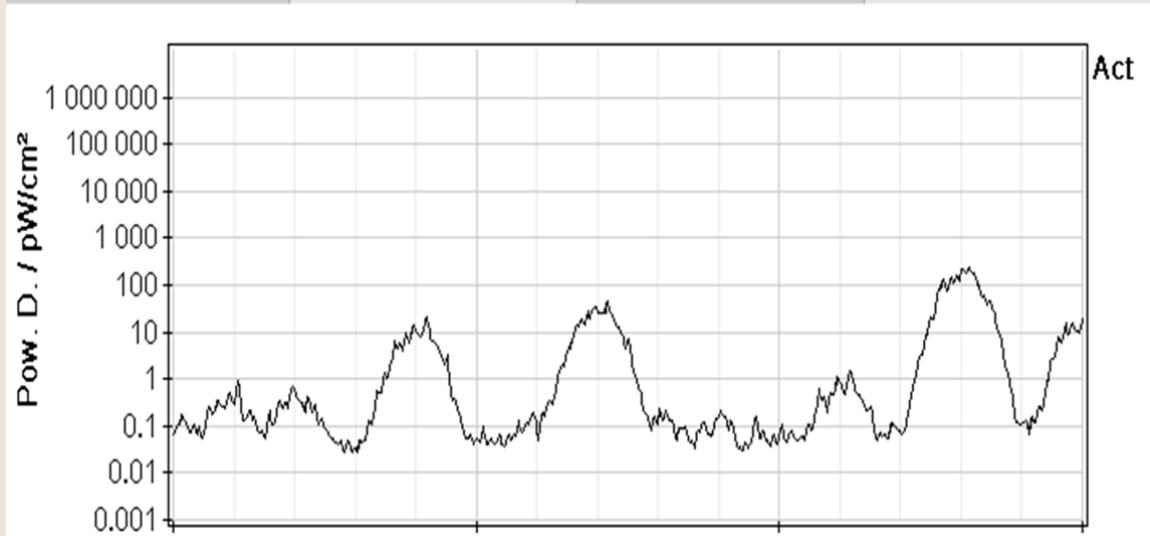

The readings were taken at different dimensions and in different shapes. The readings were taken straight and circularly and the readings were processed to be displayed on a Google Map based on the coordinates provided by the (GPS) attached to the measuring device.

We did some recommendations to decrease the influences of SAR by the following steps:

1. Use the head set
2. Do not place your hand in front of the broadcast antenna on the mobile phone
3. Reduce the use of the phone in a place with poor coverage
4. It is necessary to inform the telecommunications companies about coverage problems, in the public interest
5. The mobile phone uses Power Control technology, where the phone reduces the ability to broadcast if the phone is under good coverage, meaning that the better the coverage, the less the impact of the phone.
6. Do not use the phone in places where electronic devices are available, such as hospitals and planes.
7. Do not leave the phone within the reach of children.
8. A final point is the shape that the towers give places, as their shape may be inconsistent with the place. There are many solutions for this, including the Pico Site and the Camouflage.
9. The Pico Site is a solution for buildings where a link is provided between the building to be covered and the mobile phone network. Inside the building, small antennas of different types are installed to cover the building completely and with as little capacity as possible.



References :

[1] Abdulrazzaq, Sahar Aqeel, and Jabir S. Aziz. "SAR simulation in human head exposed to RF signals and safety precautions." *Int. J. Comput. Sci. Eng. Technol* 3, 9 (2013): 224-228.

[2] Chakraborty, Chinmay, and Ankita Singh. "Determination of safe distance limit from Cellular Base station radiation exposure using SAR analysis." *Int J Comput Appl* 50 (2013): 18-22.

[3] World Health Organization (WHO) 2011 International agency for Research on Cancer. IARC classifies radiofrequency electromagnetic fields as possibly carcinogenic to humans, Press release N° 208.

[Σ] "Biological Effects of Microwaves: Thermal and Nonthermal Mechanisms". John Michael Williams, Wilsonville, Oregon. 2016

[O] Vesperman, Gary. "Possible Hazards of Cell Phones and Towers, Wi-Fi, Smart Meters, and Wireless Computers, Printers, Laptops, Mice, Keyboards, and Routers: Book One." (2016).

[1] Repacholi, M.H., 1998. Low-level exposure to radiofrequency electromagnetic fields: Health effects and research needs. *Bioelectromagnetics: Journal of the Bioelectromagnetics Society, the Society for Physical Regulation in Biology and Medicine, the European Bioelectromagnetics Association*, 19(1), pp. 1-19.

[Y] Ojuh, O. D., and J. Isabona. "Radio frequency EMF exposure due to GSM Mobile phones base stations: Measurements and analysis in Nigerian environment." *Nigerian Journal of Technology* 34, 4 (2010): 809-814.

[^] RF Safety at Base Station Sites, MMF Mobile Manufacturers Forum

[9] Chakraborty, Chinmay, and Ankita Singh. "Determination of safe distance limit from Cellular Base station radiation exposure using SAR analysis." *Int J Comput Appl* 50 (2013): 18-22.

[10] World Health Organization (WHO) 2011 International agency for Research on Cancer. IARC classifies radiofrequency electromagnetic fields as possibly carcinogenic to humans, Press release N° 208.

[11] H. Eger 2008 Are RF-fields able to rise the risk of cancer?, Workshop presentation.

[12] B. Thors, M. L. Strydom, B. Hansson, F. J. C. Meyer, K. Kärkkäinen, Peter 2008 On the Estimation of SAR and Compliance Distance Related to RF Exposure From Mobile Communication Base Station Antenna, IEEE Transactions on Electromagnetic Compatibility.

[13] J. Gavan. 2008 V Base Stations and Headsets Mobile Radio Systems Radiation: Analysis, Mitigation and Simulations Techniques", International Conference on Communication Systems, Gold Coast Australia.

[14] M. Pillana, L. Ahma, E. Hamiti 2008 V Human exposure assessment in the vicinity of 900 MHz GSM base station antenna. International Journal of Communications.

[15] JA. Elder, CK. Chou 2008 Auditory Response to Pulsed Radiofrequency Energy", Bioelectromagnetics Supplement.

[16] Bernardi, Paolo, et al. "Specific absorption rate and temperature increases in the head of a cellular-phone user." *IEEE transactions on microwave theory and techniques* 48, 7 (2000): 1118-1126.

Eng:

Nabaz Jamal Ahmad